MONOCHEM

METALLICS

Liquid Metallic Pigment

MADE IN U.S.A.

Monopole metallic pigments create a light reflective multi-dimensional effect with depth and sparkle. There are endless creative techniques that can be used to articulate personal style. These water based dispersion metallic's allow for ease of application and can be used interior or exterior, vertical or horizontal. Depending on the desired look, you can customize the base color to your preference. We recommend adding the liquid metallic's to Permashield 100, urethane-modified acrylic, and Permashield 200, two-part polyurethane.

Liquid Metallic Pigments for Multi-Purpose Applications

The pigment effect shown is altered according to the base color (listed below each color swatch).
Depending on the metallic pigment the sheen level may be altered.

Recommended Pigment Load: 1-2 pounds of Metallics per gallon.

APPLICATION:
STEP 1: COLOR BASE COAT
Apply one coat of **MONOBOND** desired color at 350 square feet per gallon.

STEP 2: METALLIC COLOR COAT
Add 1-2 pounds of liquid metallics to product
Apply one coat of either Permashield 100 or Permashield 200
Permashield 100: one-part acrylic-urethane:
Coverage: 275-320 Sq. Ft per gallon
Permashield 100 Clear Gloss: 5450
Permashield 100 Clear Low-Gloss: 5460

Permashield 200-two-part polyrethane with a 45 minute pot life.
Coverage: 250-300 Sq. Ft. per gallon.
Mix metallic pigment into Part A by hand for 3 minutes before activating product.
Permashield 200 Clear Gloss: 5350
Permashield 200 Clear Matte: 5355

STEP 3: CLEAR TOP COAT
Apply one standard clear coat of either **PERMASHIELD 100** or **PERMASHIELD 200** the metallic 2nd coat.

*Refer to the Technical Data Sheet for each specific preparation instructions on each product.

DRY TIMES:
Monobond:
Allow 2-3 hours of dry time before top coating. If 24 hours are exceeded, the will need to be abraded for proper adhesion.

Permashield 100:
•Recoat: 1-2 hours between coats
•Light Foot Traffic: 4-5 Hours
•Full Foot Traffic: 24 Hours
•Heavy Objects & Hot Tire Exposure: 4-5 Days

Permashield 200:
•Recoat: 4-6 hours between coats
•Light Foot Traffic: 24 Hours Full
•FootTraffic: 48 Hours
•Heavy Objects & Hot Tire Resistance: 5 Days

SPRAY • BRUSH • ROLL

1502 Pearl Copper
Base Color: Copper

1502 Pearl Copper
Base Color: Antique Copper

1502 Pearl Copper
Base Color: Antique Bronze

1502 Pearl Copper
Base Color: Statuary Bronze

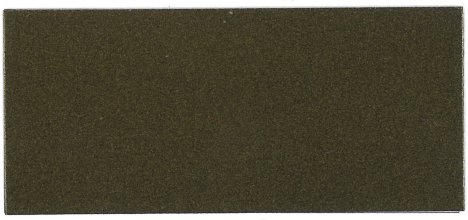

1502 Pearl Copper
Base Color: Dark Bronze

Suggested Base Colors
Create a variety of decorative options by choosing your own custom base color

MONOPOLE INC.
Manufacturer of
U.S. SPECIALTY COATINGS

4661 Alger Street • Los Angeles, CA 90039
Tel: 818-500-8585 • Fax: 818-502-0818
www.monopoleinc.com • Email: info@monopoleinc.com